


High Speed Cable 20276 80 C 30V VW-1

**NOTE:**

- 1.Electrical properties:
  - 1.ALL COMPONENTS ARE RoHS COMPLIANT.
  - 2.100% OPEN AND SHORT TEST.
  - 3.CONDUCTOR RESISTANCE:3 OHMS
  - 4.INSULATION RESISTANCE:10 MEGOHMS.
  - 5.Tested by Quantumdata 780E handheld test Instrument for DP1.2(21.6G) 3840\*2160 60Hz(8bit) pass
  - 6.Minimum Bending Radium: 60mm
  - 7.with ROHS and REACH compliant

**MODEL LIST**

Model	Ver	Length	DSP
11.99.5604	E	7500mm	4K*2K 60HZ
11.99.5609	E	10000mm	4K*2K 60HZ

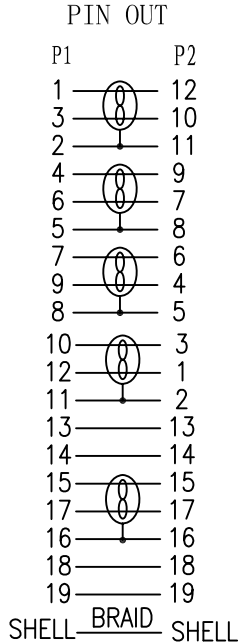

**MATERIAL LIST**

No.	PART NAME	DESCRIPTION	QTY						
⑤	DUST COVER	PE, COLOR: TRANSPARENT	2						
④	CABLE	(28AWG B*1P+D+AL+HM)*5C+28AWG B*4C+AM+D+16/10/0.12ALM+PVC OD:7.0+0.1MM COLOR:BLACK	L	<b>SECOMP</b>					
				NAME	VALUE DisplayPort Cable, DP-DP, M/M, black				
③	OUTER MOLD	BLACK ABS	2	MODEL No.	11.99.5604 / 11.99.5609	MAPE	TOLERANCE		
②	INNER MOLD	LD-PE	2				X. ±1.00MM X.X ±0.50MM		
①	CONNECTOR	DisplayPort MALE,GOLD PLATED PIN,NICKEL PLATED SHELL	2	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM	
No.	PART NAME	DESCRIPTION	QTY				PAGE	1/1	