



SPECIFICATION : 24AWG (1/0.5CU*1P+1/0.4CCS+AM)*5PCS+1/0.4CCS*4C+AM+1/0.4CCS+128/0.12ALM+PVC9.5±0.2mm

ITEM		SPECIFICATION	
CONDUCTOR	AWG	24AWG	26AWG
	MATERIAL	CU	CCS
	COND. SIZE	1/0.5CU±0.01mm	1/0.4CCS±0.01mm
INSULATION	MIN. AVG. THICK	0.20mm	0.10mm
	MATERIAL	FM-PE+SKIN	PE
	OD	1.45±0.05mm	0.8±0.05mm
TWISTED PAIR	NO.	1P*5C	4C
	AWG	24AWG+26AWG	
	MATERIAL	CU+CCS	
SPREAD AL. FOIL	COND. SIZE	(1/0.5CU±0.01mm)*2+(1/0.4CCS±0.01mm)*1	
	SIZE	12mm	
MYLAR	COVERAGE	125%	
	SIZE	26mm	
DRAIN	COVERAGE	125%	
	MATERIAL	CCS	
BRAID	SIZE	1/0.4CCS±0.01mm	
	MATERIAL	AL-MG ALLOY	
	SIZE	8*16/0.12±0.01mm	
JACKET	COVERAGE	85%	
	MATERIAL	BLACK PVC	
	COLOUR	BLACK	
	O. D	9.5±0.2mm	

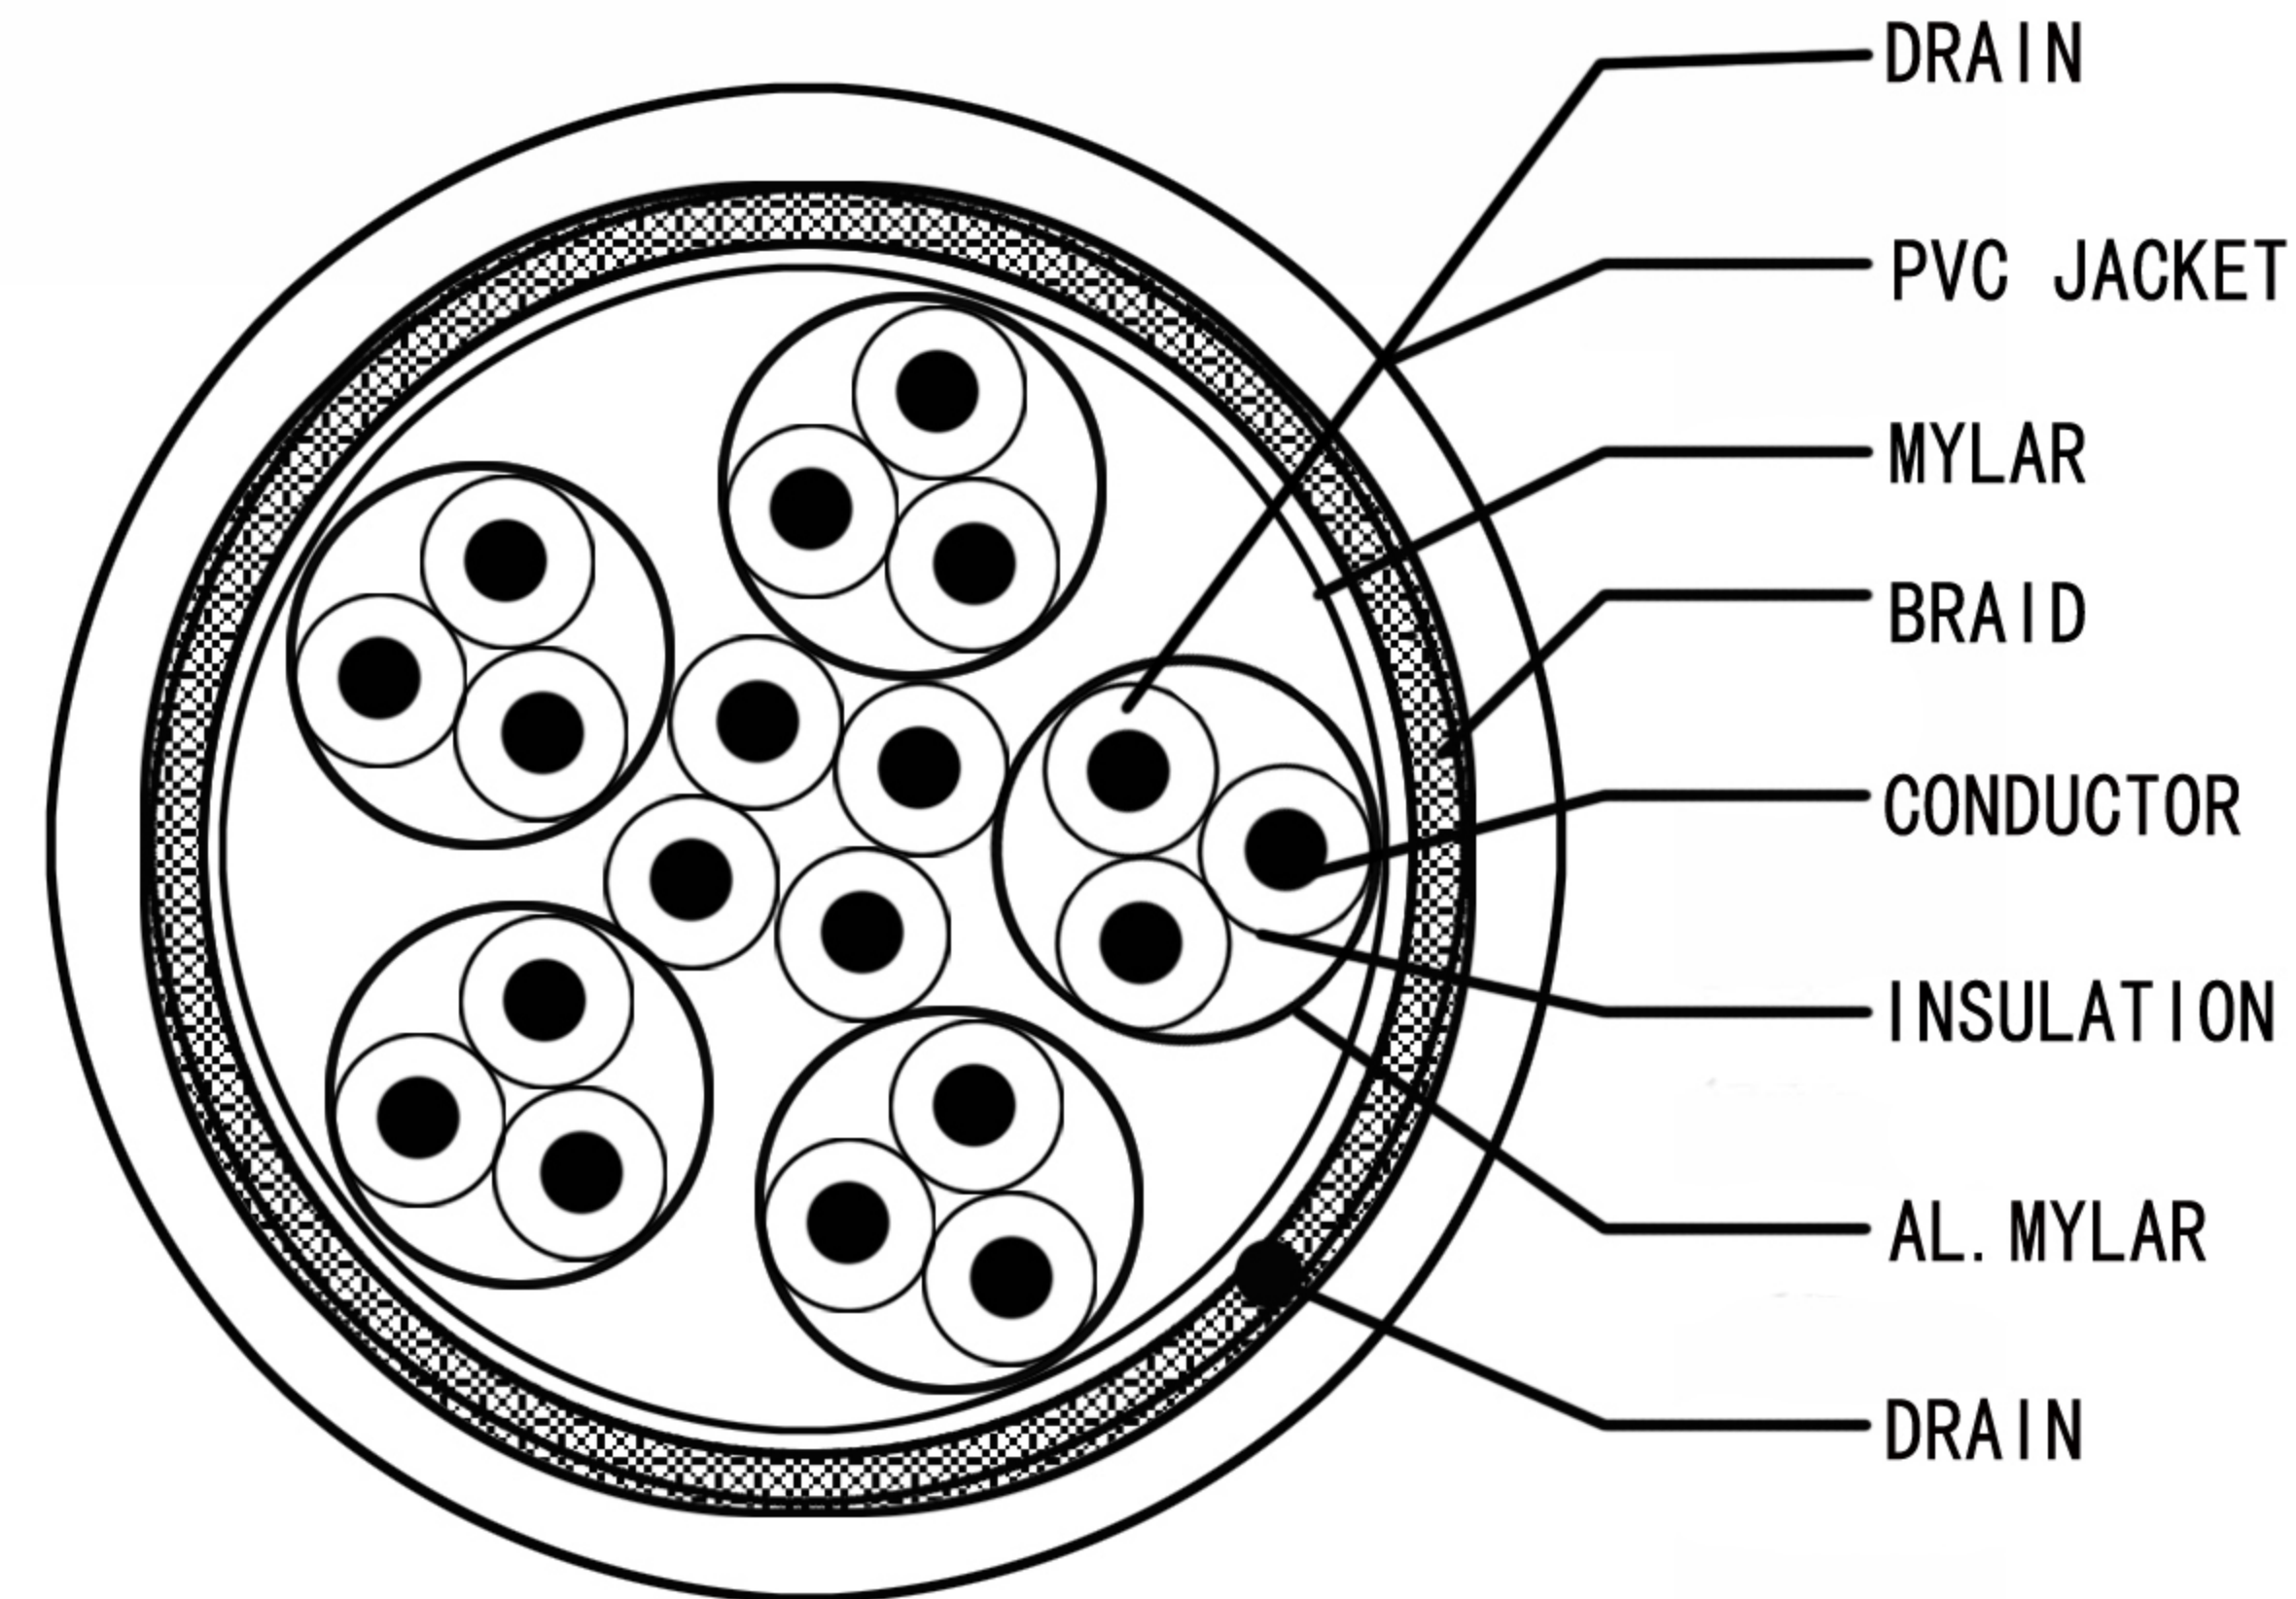

ELECTRICAL:HDTV-DVD TEST:1080P

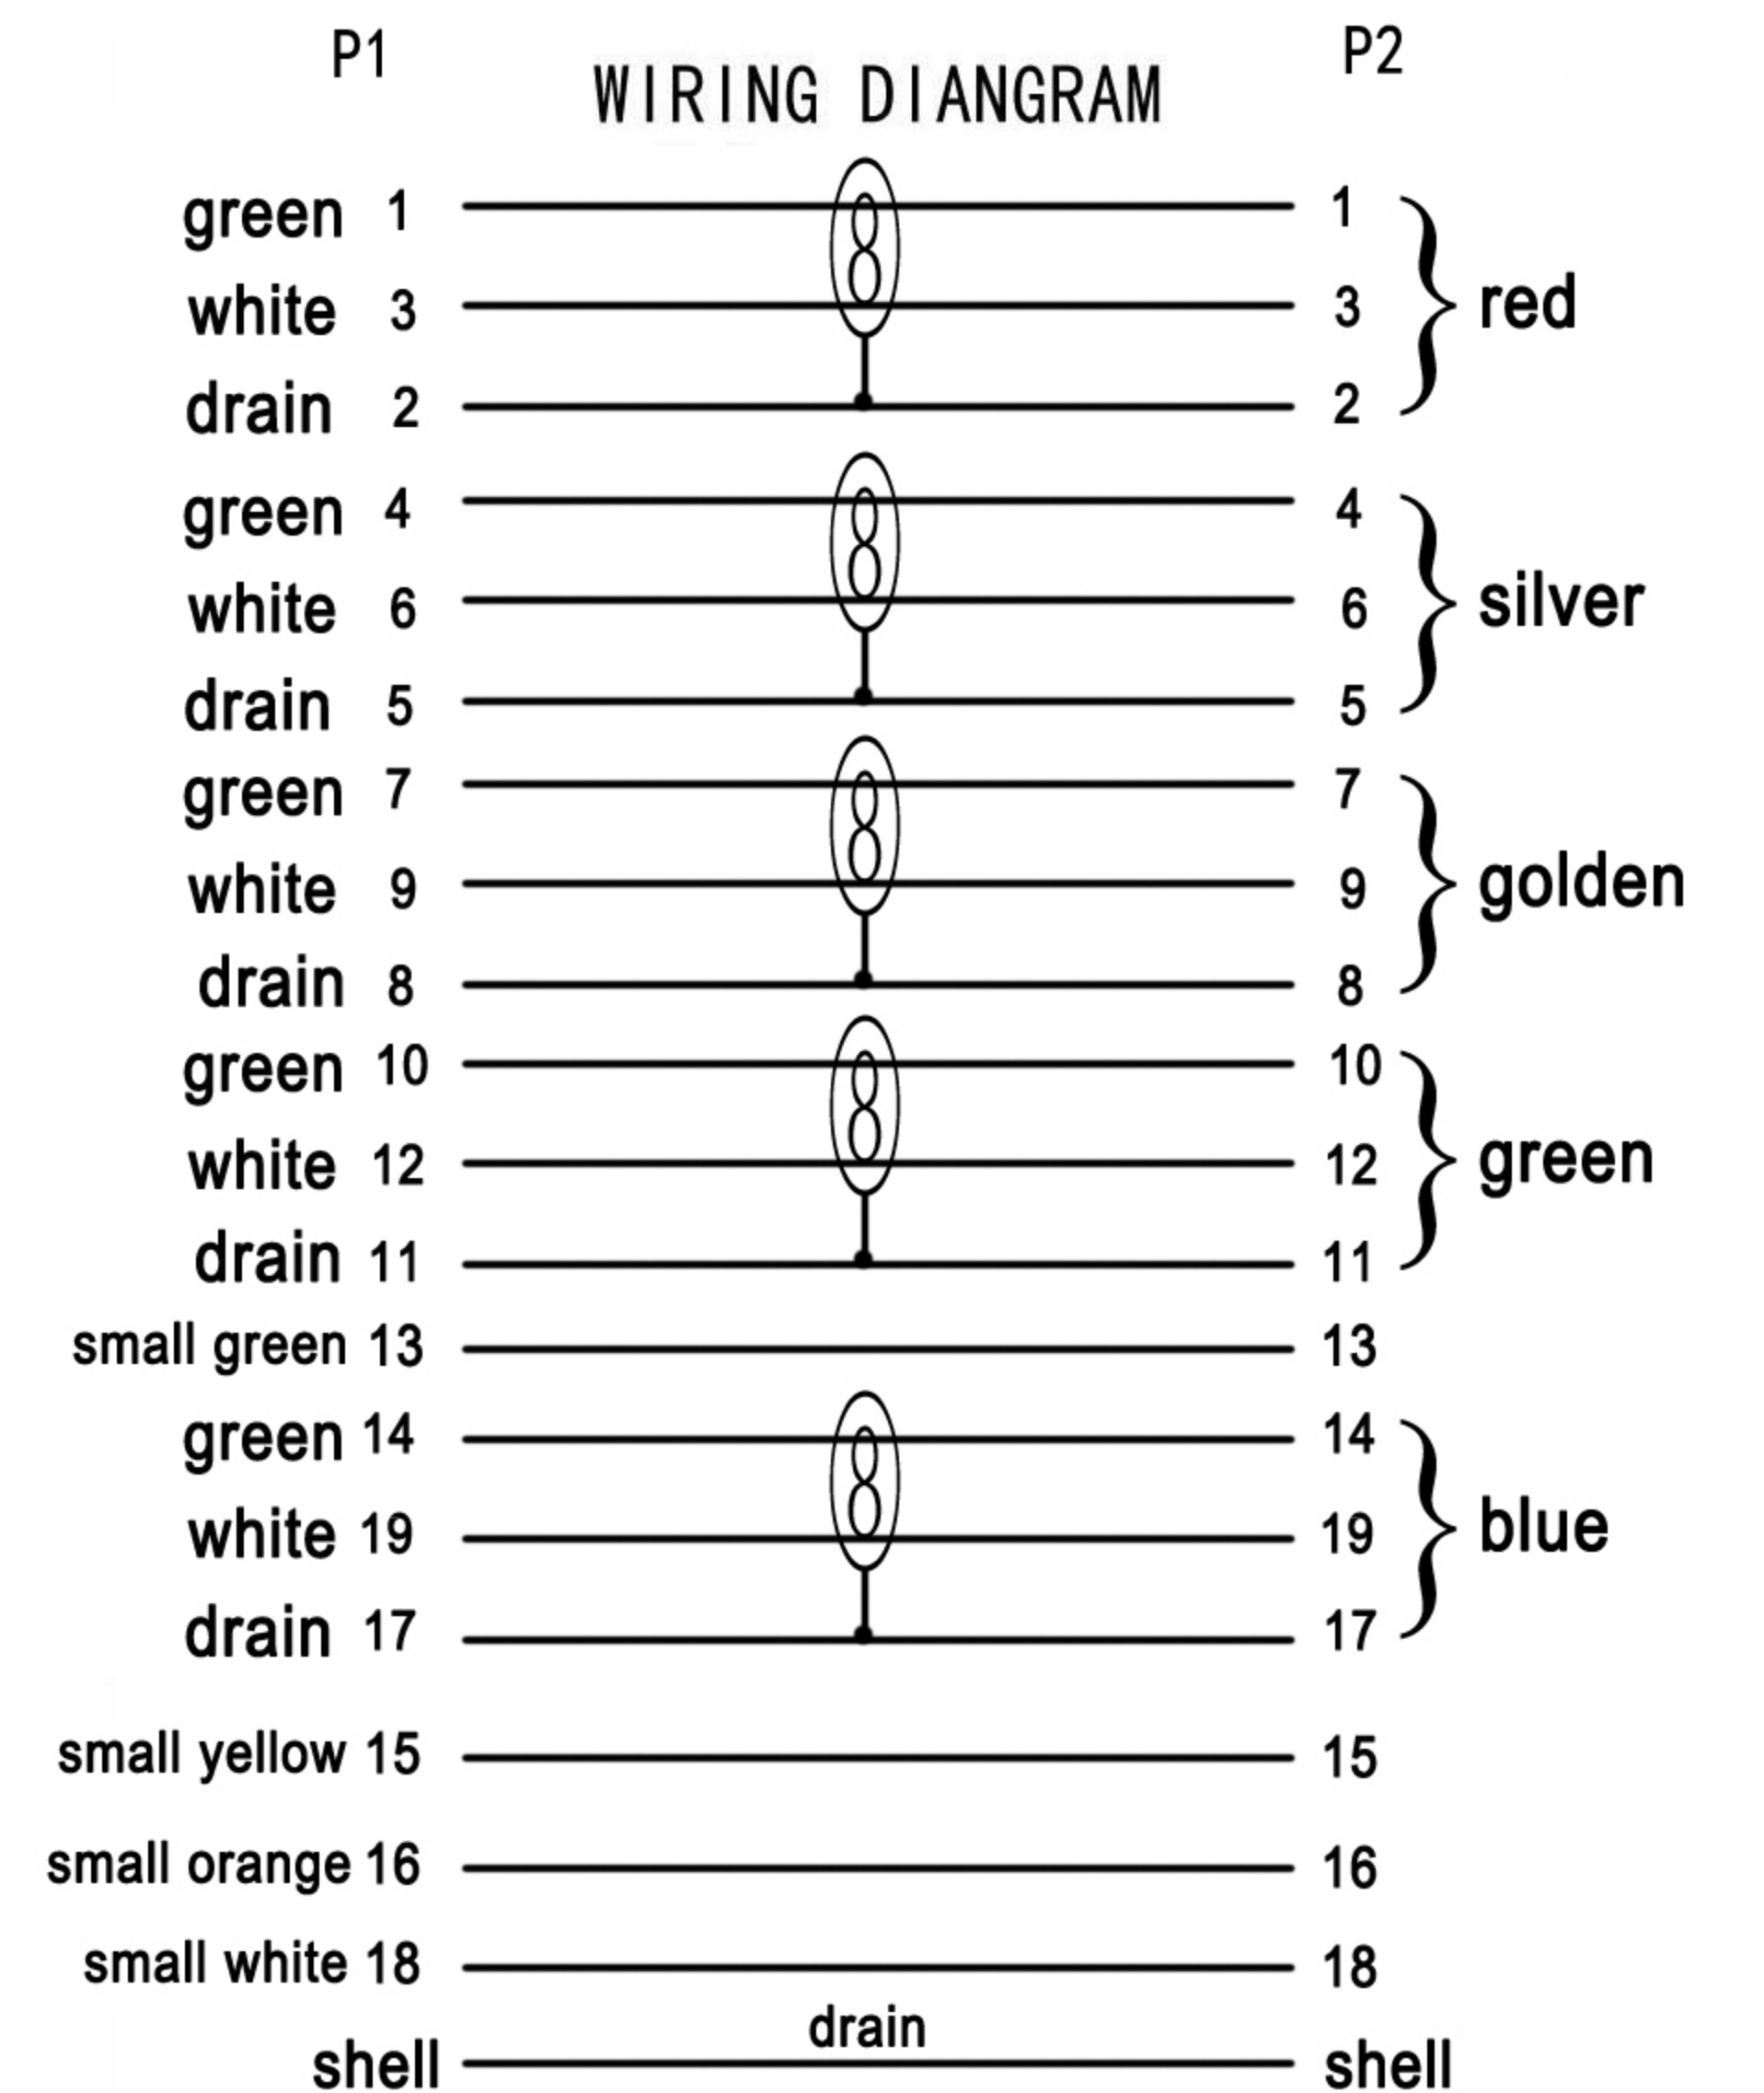

SECOMP

VALUE HDMI HS Cable+Eth,A-A,M/M,blk

CHECKED: Zhang Guo Yu

APPROVED: Liu Wen Jun

DRAWING: Zhuang Qing Yan

CUSTOMER:

DESIGN: Liu Ting Feng

DATE: 2022.10.12

MODEL NO. : 11.99.5547 (15M)

11.99.5548 (20M)